



GROOVED COUPLING

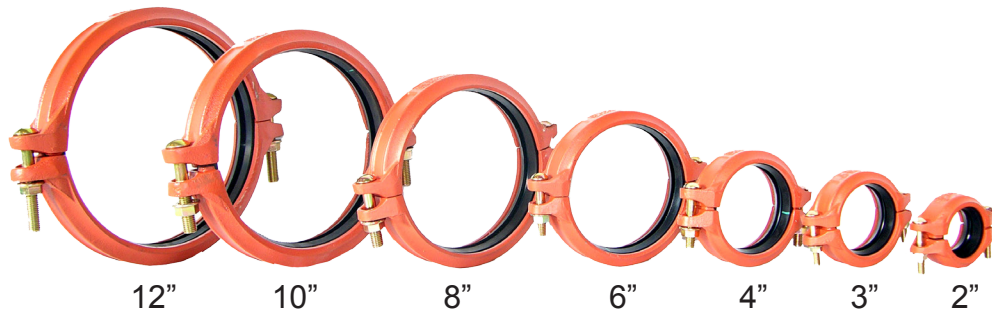

Grooved Fittings are a popular method of making pipe connections with larger diameter pipe in the Agricultural market. These fittings are compatible with grooved PVC pipe ranging in size from 2” through 12”. Each cast iron fitting comes with a matching rubber seal and two bolts and nuts for a leak proof connection. Grooved fittings can be removed as needed and re-used with no gluing or cutting of pipe required.

Features:

- Grooved flexible couplings have a 300 psi ratings

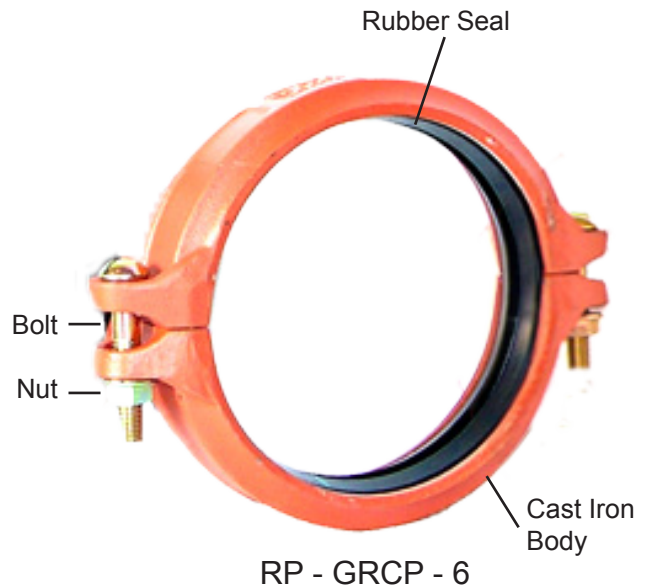

PART NUMBERS	DESCRIPTION
RP - GRCP - 2	2” dia, two piece cast iron, grooved, flexible coupling, 300 psi rating
RP - GRCP - 3	3” dia, two piece cast iron, grooved, flexible coupling, 300 psi rating
RP - GRCP - 4	4” dia, two piece cast iron, grooved, flexible coupling, 300 psi rating
RP - GRCP - 5	5” dia, two piece cast iron, grooved, flexible coupling, 300 psi rating
RP - GRCP - 6	6” dia, two piece cast iron, grooved, flexible coupling, 300 psi rating
RP - GRCP - 8	8” dia, two piece cast iron, grooved, flexible coupling, 300 psi rating
RP - GRCP - 10	10” dia, two piece cast iron grooved, flexible coupling, 300 psi rating
RP - GRCP - 12	12” dia, two piece cast iron grooved, flexible coupling, 300 psi rating

Specifications may change due to engineering changes.

HIT PRODUCTS CORPORATION

556 S. Mirage Avenue • P.O. Box 929 • Lindsay, CA 93247

TEL.: (559) 562-5975 • FAX: (559) 562-6626 • EMAIL: sales@hitproductscorp.com

March 2015